


Integrating a Streamate White Label via RocketGate

I. Description

You can upsell to your white label by posting new users to our system and having existing users click on a specially-constructed link to log in to the whitelabel. Users with valid payment details in your database will then be able to visit guest chat and paid chat on the whitelabel using their existing account information.

Note: We *highly recommend* that you validate your integration with Streamate and perform a complete test from start to finish (including running a bill on a live credit card). Contact Reseller Support (support@cambuilder.com) for more information.

Note: The oneclick auto-login will not work if you have not already posted the user to our system.

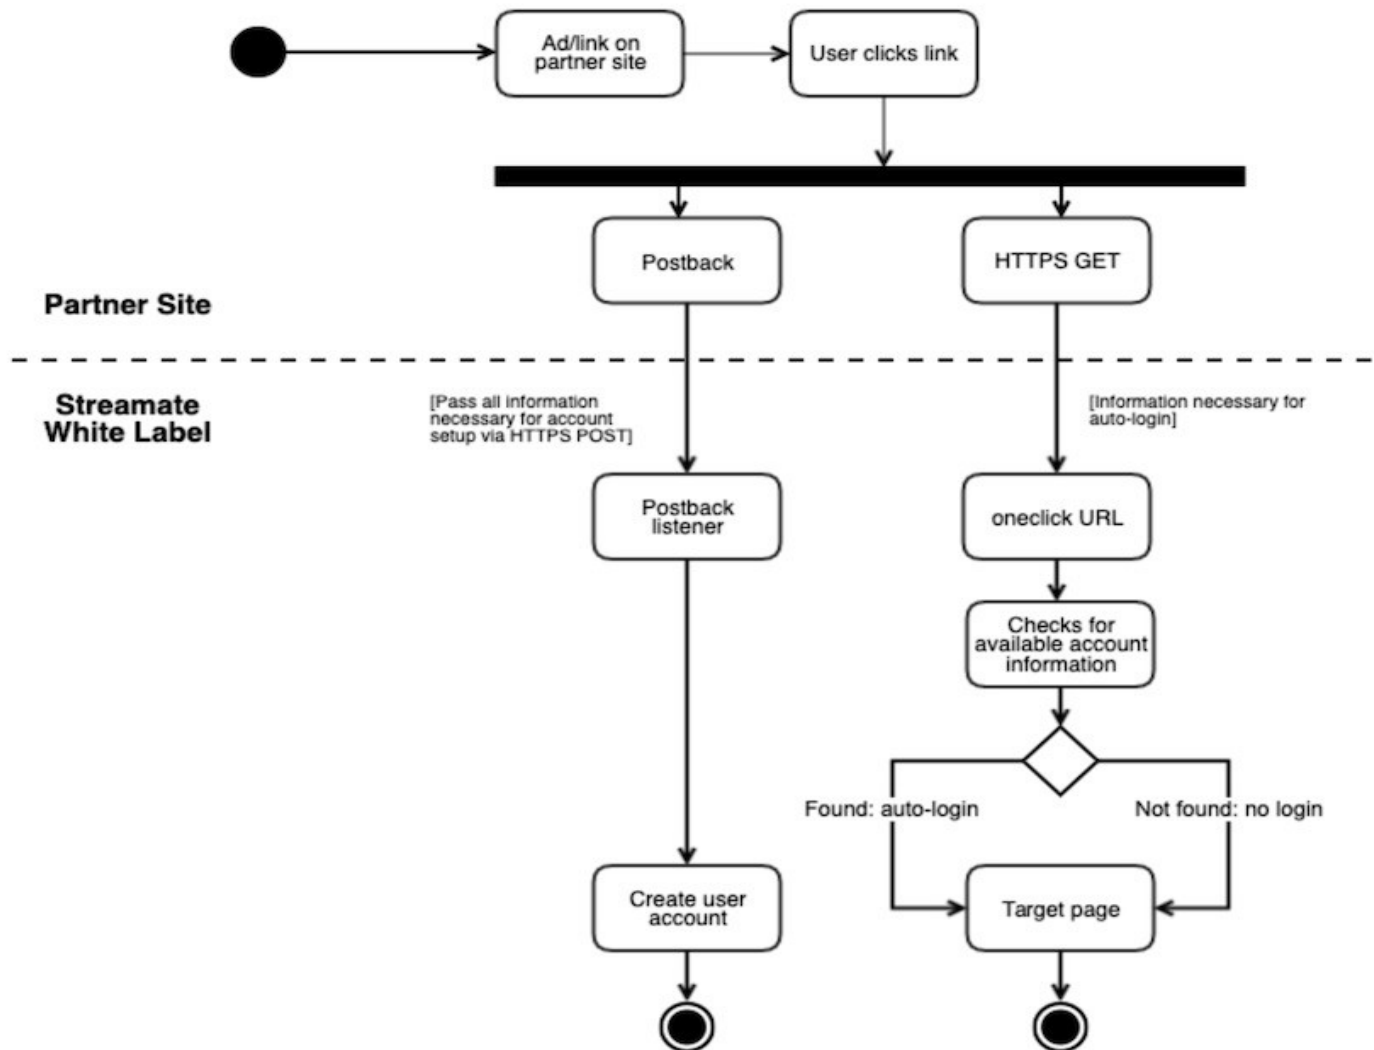

II. Process Overview

1. Send an HTTPS POST postback request using one of these options:
 - a. Create a new user
 - b. Set an existing user as fraud
 - c. Updating a password
 - d. Updating an email address
 - e. Updating a credit card
 - f. Checking for a duplicate email address
2. Handle the postback response
3. Generate one-click auto-login
4. The user is logged in to their new or existing account (if necessary) and taken to the target page, as specified in the repage parameters.

III. Postback Request

The postback is used to securely gather the necessary sensitive information to create and modify a user account on the live cam site.

This is a hidden server-to-server call; the user doesn't see anything. You will need to send an HTTPS POST to:

<https://oneclick.naiadsystems.com/legacy/oneclickpostback?provider=rocketgate>

In sections A -C, beginning on the next page, you will find the details of the various actions and parameters available.

A. Create New User

This will create a new user account in our system and will enable the user to automatically login through the oneclick URL.

Name	Description	Type	Required	Example
action	The action that should be performed.	char(10)	Yes	join
custFirstName	The customer's first name.	char(100)	Yes	Tom
custLastName	The customer's last name.	char(100)	Yes	Jones
custAddress	The customer's street address.	char(100)	No	123 Main St
custCity	The customer's city.	char(100)	No	Seattle
custState	The customer's state.	char(2)	No	WA
custZip	The customer's zip code.	char(50)	Yes	12345
custCountry	The customer's country.	char(2)	Yes	US
custIP	The customer's IP address.	char(16)	Yes	127.0.0.1
custEmail	The customer's email address.	char(100)	Yes	foo@example.com
custPassword	The customer's password.	char(30)	Yes	foobar
custNick	An optional nickname for the user to use on the cam site.	char(32)	No	superman
referredCustomerId	The Rocketgate customer ID used to bill this customer.	char(100)	Yes	65891358435
referringMerchantID	The Rocketgate merchant ID that this customer bills on.	char(20)	Yes	978546
siteid	The Rocketgate site ID this customer bills on, if applicable. (This can be used to distinguish between MIDs, descriptors, etc.)	char(20)	No	2
cardHash	The Rocketgate card hash value used to bill this customer.	char(64)	Yes	QVImJyFEaUIWmliZVgNBhFViMJmTkHWUITUCSWSJliAgE2QZkVc=
Note: Please ensure your cardHash content is properly URL-encoded (no spaces).				
cardFirst6	The first six digits of the credit card number.	unsigned int(6)	Yes	999999
cardLast4	The last four digits of the credit card number.	unsigned int(4)	Yes	9999
cardExpiration	The expiration date of the credit card.	date(MMY)	No	0313 (= March 2013)
cardType	The type of credit card.	char(20)	No	Visa
referrerid	The referrer ID we have assigned to you.	unsigned int(3)	Yes	123
tracking_id	The optional tracking ID you would like to assign this user.	unsigned int(10)	No	456
tracking_key	The optional tracking string value you would like to assign this user.	char(100)	No	Banner-54321
currency	The optional 3-letter currency code to use to bill this user. Defaults to USD if none is passed. Possible values: CHF,GBP,EUR,AUD,CAD	char(3)	No	EUR

B. Checking for a Duplicate Email Address

This action enables you to check for an existing user's email in our system. This returns OK if the email address is not found.

Name	Description	Type	Required	Example
action	The action that should be performed.	char(10)	Yes	checkem
custEmail	The email address to check.	char(100)	Yes	foo@example.com
referrerid	The referrer ID we have assigned to you.	unsigned int(3)	Yes	123

III. Postback Response

The following are a list of responses you may receive:

Response	Description	Applicable Actions	Retry Occurs
OK	successful action	all	n/a
ERROR_1	duplicate email address already exists in the system	checkem	No
ERROR_2	recoverable error - typically will be a temporary issue like a database error	join	Yes
ERROR_3	non-recoverable error	all	No

IV. One-click Auto-login

This script allows a previously posted (in our system) user account to automatically log-in and browse the live cam site. All parameters below are required and some values are *encoded*, and require our encoding library in order to be generated. Send an HTTPS GET to:

<https://oneclick.naiadsystems.com/legacy/oneclick?provider=rocketgate>

Name	Description	Example
email	An encoded string that will be decoded and used as the email address/login username.	fK0c%235I%24tGsl%5Exa
pwd	An encoded string that will be decoded and used for the password.	kpY0pOe%2AG
chksm	A computed value generated by the encoding library.	d1a64524258552fbf8a6482aca8f0f5
chksmv	A computed value for the encoding version you are using (generated by the library).	1.5
rid	The referrer id we have assigned to you	92

Addendum A—OneClickEncoding

The user's email address and password must be encoded with our OneClickEncoding library before being attached to the URL. The encoding library is time-based; therefore the encoded values should be regenerated for every link. The OneClickEncoding library contains specific instructions as to its use. If you don't use the encoding library as stated, the user's email and password will be incorrectly encoded, and the one click will not be completed.

Example PHP call for encoding:

```
EncodeURLParameters (  
'email@example.com', // user's plain text email  
'TestPassword', // user's plain text password  
AuthKey, // auth key given to you by Streamate  
true, // returns the values in an array  
);
```

Values returned: (Append these to the URL)

```
Array (  
[email] => %21%24v%23j%2Cg%261qFIZ%2B04IIM%40D  
[pwd] => w%24v%23xgnfJWVb  
[chksm] => bd5b83dc83d712f0a341fc9f1c042783  
[chksmv] => 1.5  
)
```

Example URL with all above arguments appended, including the encoded values from our library:

```
https://processor.naiadbilling.com/api/v1/oneclick/rocketgate?rid=99&email=%21%24v%23j%2Cg%261qFIZ%2B04IIM%40D&pwd=w%24v%23xgnfJWVb&chksm=bd5b83dc83d712f0a341fc9f1c042783&chksmv=1.5
```

Addendum B—“repage” Values

Name	Description	Examples
cam	The cam/bio page of a specific model, using the model's nickname.	repage=cam reargs=OliviaRose
category	A category-specific search for models of that type; the available list is found on the front page of your white label.	repage=category reargs=huge-tits
golive	The GoLive chat ad tool. (No reargs required.)	repage=golive
golive-iframe	The iframe version of the GoLive chat ad tool.	repage=golive-iframe reargs=t%3Dbio%26only%3D1%26wmode%3Dopaque%26width%3D316%26height%3D238
tour20	The iframe tour. Include all the arguments you would normally use in the tour to customize your look and feel. (See Addendum C.)	repage=tour20 reargs=clr_bg%3D000000%26clr_fg%3DFFFFFF
Wild	Set the URL to the page designated in reargs.	repage=wild reargs=landing/1

Addendum C—Creating the Tour reargs Value

Using the tour20 repage value, you can create a tour with one-click links. The possible reargs match the tour's customization parameters. In order to add these parameters to your one-click link, however, they must be URL-encoded.

1. Go to the tour generator:

[https://www.\[white_label.domain\]/exports/code/tour_20/index.php](https://www.[white_label.domain]/exports/code/tour_20/index.php)

2. Use the available parameters to customize your tour, then click the “Try it” button to generate the code you want.

Example:	<pre>< i f r a m e src="http://www.streamate.com/exports/tour_20/index.php?cols=2&rows=3&df=4096" width="320" height="663" frameborder="0" scrolling="no"></iframe></pre>
-----------------	---

3. To create the reargs value, use the src value and remove everything else.

Example:	<pre>cols=2&rows=3&df=4096</pre>
-----------------	--

4. Convert the parameters to URL-encoding by using the tool:

<https://meyerweb.com/eric/tools/dencoder/>

- a. Paste the parameters and click the “Encode” button.

Example:	<pre>cols%3D2%26rows%3D3%26df%3D4096</pre>
-----------------	--

5. Use the results as your reargs value and add them to your one-click link.

Example:	<pre>https://oneclick.naiadsystems.com/legacy/oneclick?provider=rocketgate&rid=99&email=%21%24v%23j%2Cg%261qFIZ%2BO4IIM%40D&pwd=w%24v%23xgnfJWVb&chksm=bd5b83dc83d712f0a341fc9f1c042783&chksmv=1.5&repage=tour20&reargs=cols%3D2%26rows%3D3%26df%3D4096</pre>
-----------------	---

6. Set the new one-click link as the src for your iframe.

Example:	<pre>< i f r a m e src="https://oneclick.naiadsystems.com/legacy/oneclick?provider=rocketgate&rid=99&email=%21%24v%23j%2Cg%261qFIZ%2BO4IIM%40D&pwd=w%24v%23xgnfJWVb&chksm=bd5b83dc83d712f0a341fc9f1c042783&chksmv=1.5&repage=tour20&reargs=cols%3D2%26rows%3D3%26df%3D4096" width="320" height="663" frameborder="0" scrolling="no"></iframe></pre>
-----------------	---